



废钢尾料分选专家  
Steel Scrap Sorting Expert

源自中国磁都，服务世界各[处](#)  
最具吸引力的磁电、固废分选设备供应商



天力磁电废钢行业  
TIANLI MAGNET STEEL SCRAP

### 浙江天力磁电科技有限公司

地址：浙江省东阳市书院路11号  
电话：0579-86816586 400-1122-958  
手机：15988580888  
传真：0579-86816587 0579-86817958  
邮箱：tl@tianlimagnet.com  
网址：<http://www.dylcdcsb.com>

ZHEJIANG TIANLI MAGNET TECHNOLOGY CO., LTD.  
ADD : NO.11 SHUYUAN ROAD, DONGYANG CITY, ZHEJIANG PRO, CHINA  
Tel: 0579-86816586 400-1122-958  
Fax: 0579-86816587 0579-86817958  
Email: tl@tianlimagnet.com  
Web: <http://www.tlmtech.cn>



关注公众号  
了解更多资讯

浙江天力磁电科技有限公司  
ZHEJIANG TIANLI MAGNET TECHNOLOGY CO., LTD.



## COMPANY PROFILE

# 公司简介

浙江天力磁电科技有限公司是景森控股的全资子公司，国家高新技术企业，成立于2006年，位于素有“中国磁都”“东方好莱坞”之称的浙江省东阳市，交通便利，距义乌机场仅20公里。

公司集科研开发、工艺设计、安装服务于一体，是磁选、除铁、起重、涡电流分选、智能传感分选、智能分拣机器人及各种固废分选设备的专业化制造公司，公司与国内多所高校和科研单位密切合作，先后开发出磁选、除铁、起重、涡电流分选、智能传感分选、智能分拣机器人、移动分选、固废分选等几十种产品几百个规格，公司拥有多项发明专利，几十项实用新型专利。

公司产品广泛应用于矿山、建材、煤炭、砖瓦、冶金、化工、造纸、橡胶、玻璃、食品、环保等行业及生活垃圾、陈腐垃圾、废旧电子电器、建筑装修垃圾、大件垃圾、废钢尾料、垃圾发电厂焚烧炉渣处理等城市矿产行业。

公司拥有自营进出口权，产品遍布全国各地并出口三十多个国家的地区，凭借良好的企业资质、先进的生产技术、过硬的产品质量、合理的价格、完善的售后服务，与广大客户真诚合作、开拓进取、共图发展，向世界一流的企业迈进，公司全体员工热情欢迎国内外新老客户光临指导。

Zhejiang Tianli Magnet Technology co., Ltd, focus on the Magnetic&sorting, eddy current separation, sensor separation technology application, provides material recycling and processing solutions for industry such as recycling, mining, electricity and construction, etc. Especially in recycling industry, by the innovative product like ESC machine, sensing metal separator, drum magnet,.etc. and optimized solutions, we can guarantee metals recovery reach to 95-98% when they are employed in PET plastic scrap steel, waste refrigerator, sawdust, living garbage, paper pulp and other processing line and bring big profits to clients.

Tianli company attaches great importance to brand promotion and participates in conferences and exhibitions of various industries at home and abroad every year, including Shanghai, Guangzhou, Germany, America, Australia, Singapore, South Korea, etc. We always keep close communication with customers, constantly absorb and introduce foreign new ideas and technologies, and constantly develop and improve our products.

Tianli company has developed rapidly and is a direct supplier of magnetic separation, eddy current separator, induction separator and other equipment to many engineering companies, contractors and technical consulting companies at home and abroad. We look forward to further cooperation with you!



## 目 录 CONTENTS ○ ○



### 整线系统方案

废钢尾料预分选线	01
有色金属分选线	02
不锈钢分选线	03

### 主打产品设备

TLFXP 偏心涡电流分选机	04
TLFX 同心涡电流分选机	08
TLCG 传感式金属分选机	10
TLGTS 滚筒筛	12
TLZ 空气分选设备	13

### 相关产品设备

TLCZ 弛张筛	14
TRLR 燃料棒压块机	15
废钢厂塑料清洗回收线	16
废钢分选附属产品	18
客户案例现场	22

### 关于售后

售后服务承诺	26
--------	----

### Whole Line System Scheme

Auto Shredder Residual Pre-Sorting Solution	01
Metal Sorting System Solution	02
Stainless Steel Sorting System Solution	03

### Main Product Equipment

TLFXP Eccentric Eddy Current Separator	04
TLFX Concentric Eddy Current Separator	08
TLCG Metal Sorter	10
TLGTS Drum Screen	12
TLZ Air Separator	13

### Related Products and Equipment

TLCZ Vibratory Screens	14
TRL Fuel Rod Briquetting Machine	15
Introduction Of Plastic Cleaning And Recycling Line In Scrap Steel Factory	16
Scrap Sorting Accessory Products	18
Scene Of The Case	22

### After Sales Service

Service Commitment	26
--------------------	----




S T E E L

S C R A P

## 废钢尾料预分选系统方案

AUTO SHREDDER RESIDUAL PRE-SORTING SOLUTION

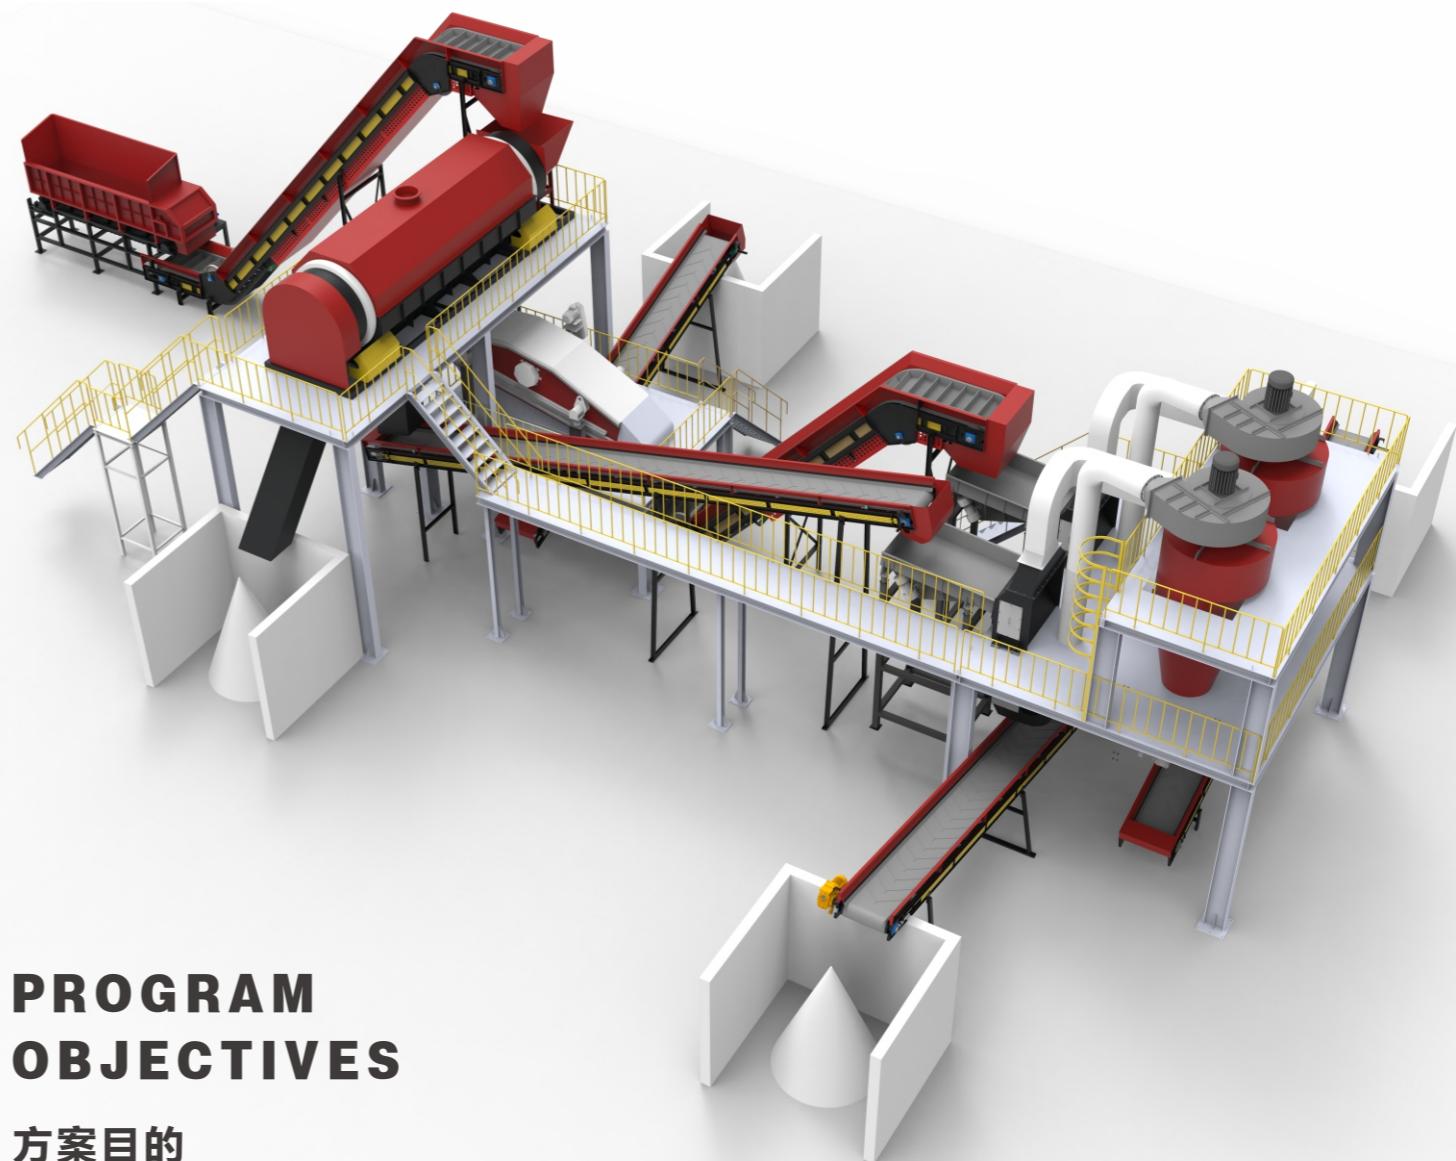

### PROGRAM OBJECTIVES


#### 方案目的

针对目前物料比较潮湿，同时需要对小颗粒进行筛分，我们采用了滚筒筛和弛张筛的组合模式，先将大颗粒进行分离，然后，小颗粒进入到弛张筛，利用弛张筛的筛分效率高及有效的筛网防堵特性，将小颗粒进行有效的筛分，筛分完之后的物料再进入到空气分选系统，分离出轻物质，分离出来的物料再进入到金属分选系统，可有效的提高金属分选系统的分选效率，该预分选系统有离线分选和在线分选两种选择。

Based on the current material is damp, at the same time need to screen of small particles, we adopt the combination pattern of roller screen and relaxation sieve, large particle separation first, then the small particles into the relaxation sieve, using the relaxation sieve high screening efficiency, screen mesh and effective prevent features, will be small particles for effective screening, screening after the material again into the air separation system, separation of the light material, the separated material into metal separation system, which can effectively improve the separation efficiency of metal separation system, the preassigned have offline and online sorting separation system of two options.

# 有色金属分选系统方案

METAL SORTING SYSTEM SOLUTION

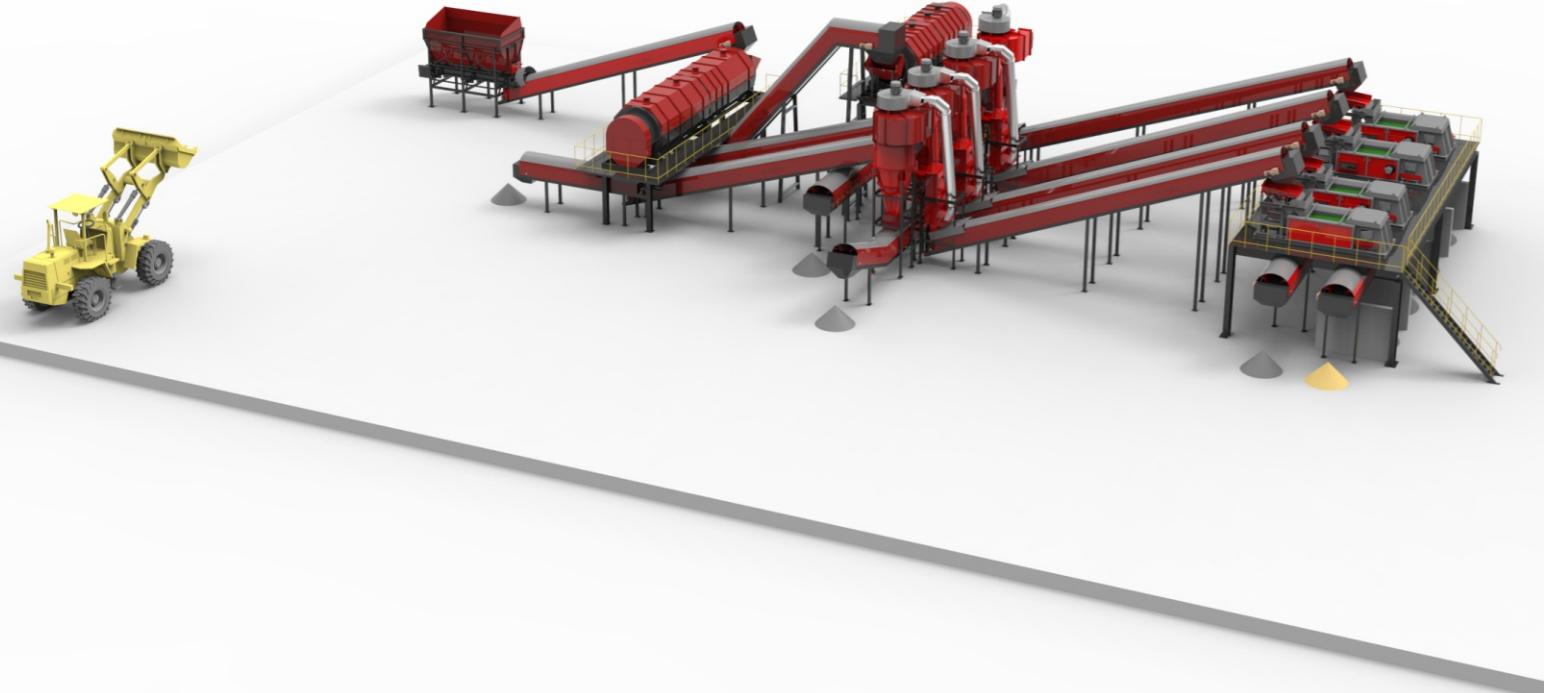

## 方案目的 PROGRAM OBJECTIVES

从废钢尾料当中分选出有价值的金属，包含铁、有色金属（铜、铝、锌、镁、金、银、铅等）。

Valuable metals are separated from scrap tailings, Contains iron and non-ferrous metals (copper, aluminum, zinc, magnesium, gold, silver, lead, etc.).



塔楼式

# 不锈钢分选系统方案

STAINLESS STEEL SORTING SYSTEM SOLUTION



## OVERVIEW OF THE BASIC PROCESS OF STAINLESS STEEL SEPARATION SCHEME

### 分选设备

进料仓（均匀定量给料） 空气分选设备（分选出轻飘物） 不锈钢分选机（分选出不锈钢、导线等金属）

Feeding (uniform and quantitative feeding) Air separation (Sort out the light stuff) Metal Sorter (sorting out stainless steel, wire and other metals)





## TLFXP 偏心涡电流分选机

### TLFXP ECCENTRIC EDDY CURRENT SEPARATOR

#### 产品简介 Product Introduction

本机采用偏心磁辊设计，大角度磁包角，配备振动给料机和挡板调节装置，紧凑合理的整机一体化设计，使得整机性能更稳定，分选效果更佳。

This equipment adopts eccentric magnetic rotor design, large Angle magnetic system, equipped with vibration feeder and baffle adjusting device, compact and reasonable integrated design of the whole machine, which makes the performance of the whole machine more stable and the separation effect better.

#### 产品优点 Product Advantage

- 1 采用全进口的轴承，有效保障设备运行的稳定的；
- 2 磁系采用独特的保护，有效保障磁系终身不脱落；
- 3 磁材来自世界磁都，具有原产地的优势；
- 4 安装了各种检查和报警系统，实时监控每个关键部件的操作；
- 5 整机采用喷塑处理，有效保证在特殊工况下的设备耐用性；
- 6 采用特殊的磁系结构设计，提供更加高效的磁源，最大提升金属的感应抛力。

Imported bearings with long service life.

Special design prevent the magnetic system fall off.

Magnetic materials come from the magnetic capital of the world and have the advantage of origin.

Check and alarm system to monitoring machine operation.

The machine adopts spray treatment to ensure the equipment durability under special working conditions.

Special magnetic system structure is designed to provide a more efficient magnetic source to maximize the inductive throwing force of the metal.

#### 设备参数 Equipment Parameters

型号 Model	给料皮带 Feed Belt				耗能 Energy Consumption	承重 Bearing	外形尺寸 Overall Dimensions(mm)		
	给料宽度 Feed Width(mm)	给料长度 Feed Length	给料颗粒 Feed Size	处理能力 Capacity(m³/h)			重量 Weight(kg)	长度 Length	宽度 Width
TLFX(P)-5	300	1500mm	$\geq 1\text{mm}^2$	6	5.9	730	4600	1123	1200
TLFX(P)-6	400	1500mm	$\geq 1\text{mm}^2$	10	5.9	895	4600	1223	1200
TLFX(P)-6.5	400	1500mm	$\geq 1\text{mm}^2$	15	5.9	950	4600	1423	1200
TLFX(P)-8	600	1500mm	$\geq 1\text{mm}^2$	20	5.9	1225	4600	1623	1200
TLFX(P)-10	800	1500mm	$\geq 1\text{mm}^2$	25	6.3	1555	4600	1823	1200
TLFX(P)-12	1000	1500mm	$\geq 1\text{mm}^2$	30	7.0	1875	4600	2023	1200
TLFX(P)-14	1200	1500mm	$\geq 1\text{mm}^2$	35	8.8	2275	4600	2223	1200
TLFX(P)-16	1400	1500mm	$\geq 1\text{mm}^2$	40	10	2850	4600	2423	1200
TLFX(P)-17	1500	1500mm	$\geq 1\text{mm}^2$	45	10	3150	4600	2523	1200
TLFX(P)-20	1800	1500mm	$\geq 1\text{mm}^2$	50	10.7	3650	5000	2823	1200
TLFX(P)-22	2000	1500mm	$\geq 1\text{mm}^2$	55	13	4500	5000	3023	1200



**核心优势**  
Core Advantage


序号 No.	类型 Type	磁极数量 Pole Number	磁场强度 Magnetic Fieldintensity(Gs)	转速 Speed(r/min)
1	偏心	38	4500	3000
2	偏心	22	4000	3000
3	偏心	22 (国内同行标准) (domestic peer standards)	3000	3000

**使用领域**  
Field Of Use

主要适用于从工业废料、生活垃圾中分选出铜、铝等有色金属。

- 生活垃圾 ;      ● 造纸厂尾渣 ;      ● 废旧玻璃回收 ;      ● 生活垃圾焚烧产生的炉渣 ;      ● 废旧金属回收 ;
- 电子垃圾回收 ;      ● 废旧塑料回收 ;      ● 木屑。

**分选效果图**  
Sorting Effect Diagram

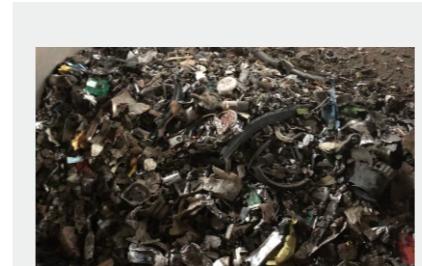

分选前  
Before Sorting




分选后(金属)  
After Sorting (Metal)



分选后(非金属)  
After Sorting(Non Metal)



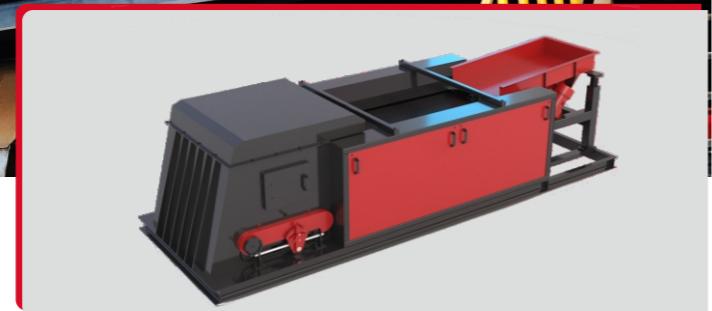

## TLFX 同心涡电流分选机

### TLFX CONCENTRIC

### EDDY CURRENT SEPARATOR

#### 产品简介

Product Introduction

天力针对TLFX同心涡电流分选机提供两款机型：双辊同心涡电流分选机和三辊同心涡电流分选机；三辊同心涡电流分选机的设计相较于双辊同心涡电流分选机设计更合理，分选效果更优。

Tianli provides two models for TLFX concentric eddy current separator: Two-roll concentric eddy current separator and three-roll concentric eddy current separator. The design of three-roll concentric eddy current separator is more reasonable than two-roll concentric eddy current separator, with better separation effect.

#### 产品优势 Product Advantage

- 1 使用进口轴承，使用寿命长，运行良好；
- 2 采用PLC可编程控制，一键启动，操作简单；
- 3 磁辊采用有效的磁系保护，防止高速运转时磁系脱落；
- 4 采用智能触碰控制系统，变频控制，运行更平稳可靠；
- 5 整机采用特殊工艺，精密打造，设备运行时噪音和振动极小；
- 6 安装了各种检查和报警系统，实时监控每个关键部件的操作。

Imported bearings with long service life.  
PLC programmable control, easy operation.  
Special design prevent the magnetic system fall off.  
Intelligent touch and frequency conversion control keep machine stable.  
Special craft, precision manufacture reduce the noisy.  
Various inspection and alarm systems are installed to monitor the operation of each key component in real time.

#### 两款机型 Two Models

主要适用于从工业废料、生活垃圾中分选出铜、铝等有色金属；可广泛应用于垃圾处理、废旧汽车拆解回收、废旧电器回收等领域，以及有色金属加工行业的物料处理等行业。

#### 产品参数 Equipment Parameters

型号 Type	给料皮带 Feed Belt				耗能 Energy Consumption	承重 Bearing	外形尺寸 Overall Dimensions			
	给料宽度(mm) Feed Width(mm)	给料长度(mm) Feed Length(mm)	给料颗粒 Feed Size	处理能力(m³/h) Capacity(m³/h)			重量(kg) Weight(kg)	长度(mm) Length(mm)	宽度(mm) Width(mm)	高度(mm) Height(mm)
TLFX-5	300			8	5.9	630		1123		
TLFX-6	400			12	5.9	795		1223		
TLFX-6.5	400			15	5.9	850		1423		
TLFX-8	600			22	5.9	1120		1623		
TLFX-10	800			27	6.3	1450	4600	1823		
TLFX-12	1000	1500	≥25mm²	32	7.0	1750		2023	1200	
TLFX-14	1200			37	8.8	2150		2223		
TLFX-16	1400			42	10	2750		2423		
TLFX-17	1500			47	10	3000		2523		
TLFX-20	1800			52	10.7	3550	5000	2823		



## TLCG 传感式金属分选机

### TLCG METAL SORTER



#### 产品简介 Product Introduction

天力TLCG传感式金属分选机，采用高灵敏传感器技术识别/检测出废料中的金属颗粒，然后通过压缩空气喷嘴将金属颗粒从废料中分离开来，从而达到实现两种不同性质物料分离的目的。


TLCG Metal Sorter, based on high sensitivity sensor technology to identify/detect the metal particles in the waste material, and then the metal particles are separated from the waste material through the compressed air nozzle, so as to achieve the purpose of separating two materials with different properties.

#### 传感配置器 Sensor Configuration

- 采用集成特殊的图像处理技术的高灵敏电磁 ( EM ) 传感器，基于材料电导率进行识别，可实现在高产量下获得最高纯度。 - Em3  
High sensitivity electromagnetic (EM) sensor based on material conductivity identification is adopted with special integrated image processing technology to achieve the highest purity in high yield.-EM3
- 电磁 ( EM ) 传感器和近红外 ( NIR ) 光谱传感器的集成，可基于材料电导率及其独特光谱特征进行识别。 - EM3-NIR1 ("poly")  
The integration of the electromagnetic (EM) sensor and the near-infrared (NIR) spectrum sensor can be identified based on the material conductivity and its unique spectral features.-em3-nir1( "poly" )

备注：分辨率：两种可选的电磁传感器分辨率为卷径25mm和12.5mm，电磁传感器可探测的最小金属尺寸为1-2mm。

Remark:Resolution: the resolution of the two optional electromagnetic sensors is 25mm and 12.5mm, and the minimum metal size detected by the electromagnetic sensor is 1-2mm.

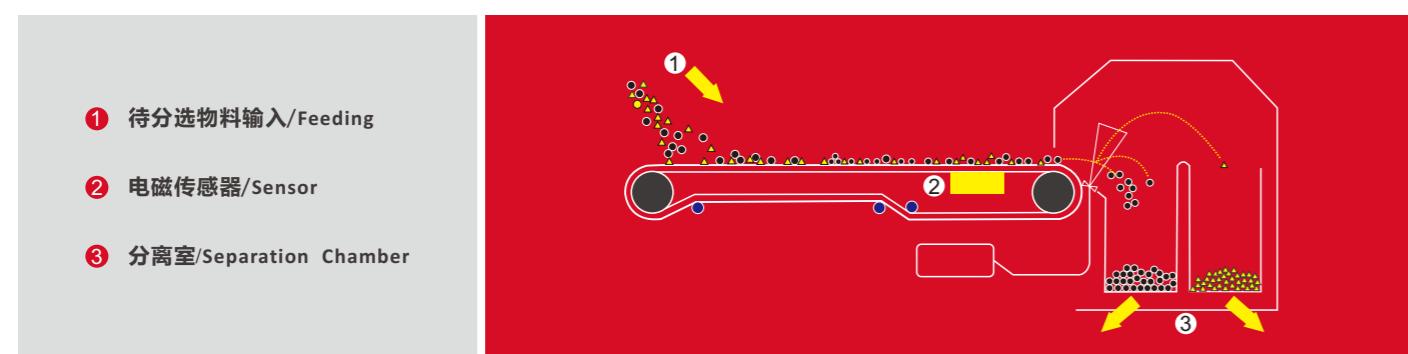

#### 产品优势 Product Advantage

- 提升产品纯度 ( 5-15% ) ; ●最大化金属回收 ;
- 稳定的分选性能 ; ●附件过程监控 ;
- 减少压缩空气消耗 ( 15-25% ) 。 ●Improve product purity (5-15%). ●Maximize metal recycling.
- Stable separation performance. ●Annex process monitoring.
- Reduce compressed air consumption (15-25%).

#### 产品规格 Product Parameters

阀组类型和喷嘴间距 Valve Type And Nozzle Spacing	TLCG-6	TLCG-12	TLCG-18	TLCG-24	TLCG-30
Ts1500/6.25mm	48阀门/valve	96阀门/valve	144阀门/valve	192阀门/valve	240阀门/valve
Ts400/6.25mm	96阀门/valve	192阀门/valve	288阀门/valve	384阀门/valve	480阀门/valve
TS200/6.25mm	96阀门/valve	192阀门/valve	288阀门/valve	384阀门/valve	480阀门/valve

型号 Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	重量 Weight(kg)	能耗 Power(kw)
TLCG-6	600	1400				2580	4.3
TLCG-12	1200	2000				3550	4.3
TLCG-18	1800	2600	4000			4360	6.1
TLCG-24	2400	3200				5760	6.6
TLCG-30	3000	3800				6520	8.1

#### 传感器的典型应用 Typical Applications Of Sensors

传感器类型 Sensor Type	A	B
典型应用/典型 Typical Applications		
各类金属回收 Metal Recycling	回收所有金属 Recycle All Kinds Of Metals	
不锈钢 Stainless Steel	获得高纯度的不锈钢物料 Get High Purity Stainless Steel	
线缆回收 Cable Recycling	获得高纯度的绝缘铜线物料 Recycle All Kinds Of Cables	
塑料回收 Rubber Recycling	回收所有可见塑料 Recycle All Kinds Of Rubbers	
塑料分选 Rubber Sorting	分选各种不同材料塑料，如PP/PS/PE,ABS/ABS-PC Sorted All Kinds Of Rubbers, Like PP/PS/PE, ABS/ABS-PC	
特殊应用 Special Application	金属提纯和杂质剔除 Metal Impurity And Remove Contamination	



## TLGTS 流筒筛

### TLGTS DRUM SCREEN

#### 产品优点

Product Advantage

- ① 筛网采用耐磨材质，使用寿命更长；
- ② 筛网可根据筛分要求，为客户量身定做；
- ③ 采用聚氨酯驱动方式，设备运行更佳平稳，噪声小；
- ④ 采用无轴式的设计，有效的针对比较复杂的垃圾物料；
- ⑤ 有六角式和圆筒式双重选择，根据不同料型和筛分要求选择。

The screen is made of wear-resistant material and has a longer service life.

The screen can be customized according to the screening requirements.

Adopt polyurethane driving mode, the equipment runs better and stably, with less noise.

Adopt the no shaft design, effectively target the more complex garbage material.

There are hexagonal type and cylinder type double choice, according to different material type and screening requirements.

## TLZ 空气分选设备


### TLZ AIR SEPARATION

#### 产品简介

Product Introduction

物料通过振动给料机，均匀进入到Z型斗中，物料由于自由落体向下运动，在经过Z型斗的过程中，将物料充分打散，再经过离心风机将轻飘物和泥土向上吸进旋风除尘器中，通过旋风除尘器将轻物质和泥土排出，重的物质由于重力的作用，在Z型斗中直接掉下，进入到后续的分选工序。

Material by vibrating feeder, evenly into the bucket, Z material due to free fall downward movement, after the process of Z type hopper, will break the material thoroughly, repass centrifugal fan and the light and mud sucked up into the cyclone dust collector, through the cyclone speak light material and soil, heavy material due to the effect of gravity, in direct drop in the bucket, Z into the subsequent separation process.

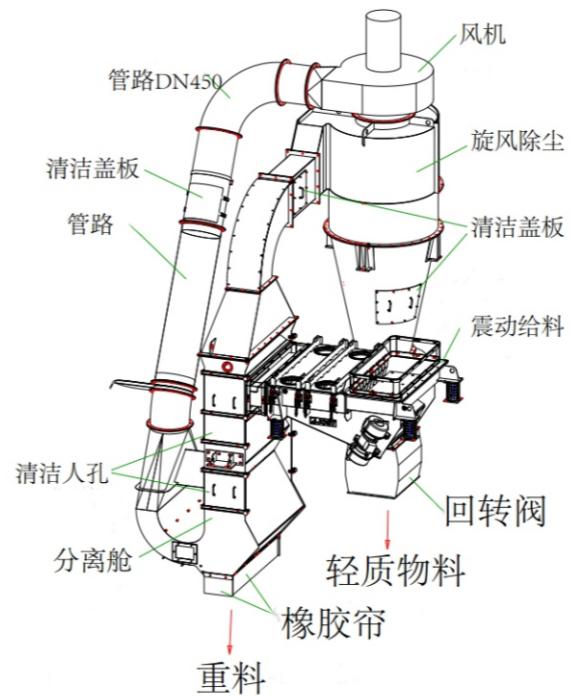

#### 产品用途

Product Use

将废钢尾料中的轻飘物和泥土分离出来，从而得到干净的物料，提高分选效率和分选纯度。

The light material and soil in the waste steel tailings are separated to obtain the clean material and improve the separation efficiency and purity.

## TLCZ 弛张筛

### TLCZ VIBRATORY SCREENS

#### 产品简介

Product Introduction

主要用于极难筛分的物料，如：湿度大、片状、粘稠物料等容易堵塞筛孔的物料进行筛分，通过电机带动激振器的震动，使得柔性聚氨酯筛板产生“弛-张”的效果，促使这些极难筛分的物料获得一个极大的加速度而被从筛板上弹起，从而在保证高效筛分的同时，确保筛孔不被堵塞。




It is mainly used for screening of extremely hard materials, such as: high humidity, flake, sticky silk material such as easy to plug mesh material for screening, through the motor drive the vibration of the vibrator, make flexible polyurethane sieve plate "Vibrating" effects, prompting the screening of the extremely hard materials for a great acceleration and the bounce from the sieve plate, to ensure efficient screening at the same time, to ensure the mesh is not blocked.

#### 产品用途

Product Use

广泛应用于极难筛分的潮湿物料，如废钢尾料、炉渣、建筑砂石等行业。

Widely used in extremely difficult to screen wet materials, such as asr material, slag, construction sand and stone industries.

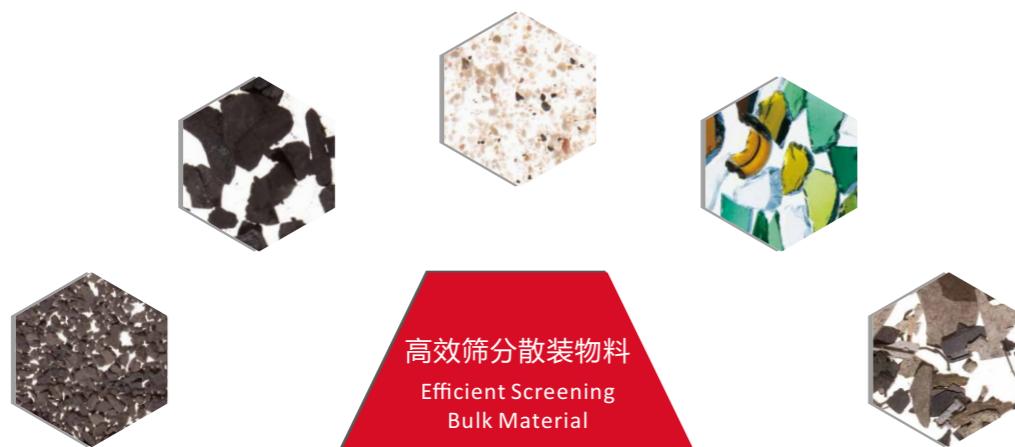

## TRLR 空燃料棒压块机

### TRLR FUEL ROD BRIQUETTING MACHINE

#### 产品优点

Product Advantage

Material feeder, conditioning device, chute made of stainless steel, durable;

The speed of the feeder can be adjusted to meet the output demand of different materials;

The machine is equipped with iron removal and overload protection device, fully consider the use of the main engine protection;

High precision gear transmission, high transmission efficiency, stable work;

Adopt new type snake spring coupling, with large compensation and more stable operation;


Imported bearing and oil seal are used in the key parts of the whole transmission system, with stable operation, long service life and low noise.



# 废钢尾渣塑料清洗回收线

## PLASTIC CLEANING&RECYLING

### SOLUTION IN THE SCRAP STEEL INDUSTRY

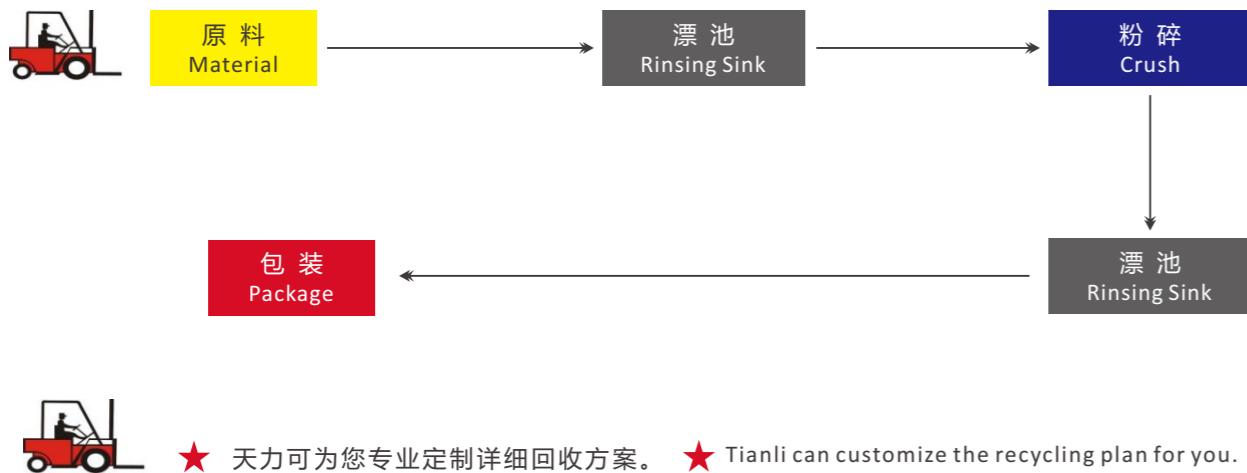

★ 天力可为您专业定制详细回收方案。 ★ Tianli can customize the recycling plan for you.

#### 产品简介 Product Introduction

### 粉碎机 SHREDDER

将物料破碎至所需尺寸，带水破碎。

带水破碎不仅能有效降低破碎时腔体内的温度,更能有效降低粉末料的产生。

Crushing materials to desired size with water. Water crushing can not only effectively reduce the temperature of the cavity during crushing.


More effective to reduce the production of powder.



#### 回收线简介 Sorting Line Introduction

天力磁电清洗回收线根据客户的实际需求和物料情况，结合多年的整线设计经验进行设计配置。根据客户的设计需求，将电杂料经过高速摩擦脱水、盐水分离、破碎、瓶片冷洗、脱水等工序后得到干净的物料。

Tianli magnet cleaning and recycling line is designed and configured according to customer's actual demand and material situation, combined with years of whole line design experience. According to the design requirements of customers, electric miscellaneous materials are obtained after high-speed friction dehydration, brine separation, crushing, cold washing and dehydration of bottle slices and other processes.

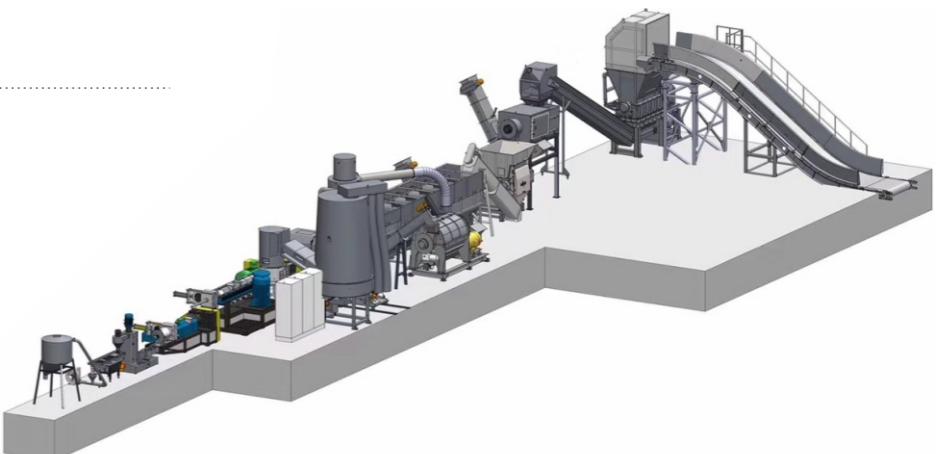

### 分离槽 (盐水/清水 )

#### PRE-WASHING MACHINES

#### 产品简介 Product Introduction

清水清洗物料，分离出浮料-PP料，并且去除物料中残留的轻质杂料，如泡沫。

根据密度法盐水分离出沉料，如金属、橡胶/玻纤等。

Clean the material with water, separate the floating material-PP, and remove the remaining light miscellaneous material in the material, such as foam.

According to the density of brine separation of sediment, such as metal, rubber/glass fiber, etc.



## RCDD 电磁自冷自卸式除铁器

RCDD Self-Cleaning Electromagnetic Separator

### 产品优点

Product Advantage

- 磁路采用计算机模拟设计，透磁深度大，磁力强；
- 自冷式全密封结构，防尘、防雨、防盐雾、耐腐蚀；
- 自动卸铁、维护简便、滚筒腰鼓形结构，具备皮带自动纠偏功能，可实现长期无故障运行；
- 产品配套性好，整流设备功能齐全，具有手动和集控功能，能满足多种场合的使用要求；
- 可有效吸除混杂在非磁性物料中0.1-30公斤的铁磁性物质。



- Adopting the computer simulation to design the Magnetic circuit, with deeper penetration, higher magnetic force.
- Self-cooled full-sealed structure, anti-dust, anti-rain, corrosion resistance.
- Automatic unloading iron, easy maintenance, The drum with waist drum structure, and automatic belt correction function, can achieve long-term trouble-free operation.
- Product matching is good, rectifier equipment is complete, with manual and centralized control function, to meet the requirements of a variety of occasions.
- Can effectively remove the ferromagnetic material weighed between 0.1-30kg mixed in the non-magnetic materials.

## 电气控制系统(整线)

Electric Control System (Whole Line)

### 产品简介

Product Introduction

电气控制系统采用PLC编程控制系统，可以自动控制、设置超载自动反转控制功能。

The electrical control system adopts PLC programming control system, which can automatically control and set the overload automatic reverse control function.




## RCYD 自卸式永磁除铁器

RCYD Self-Cleaning Perm-Magnetic Separator

### 产品优点

Product Advantage

- 磁路采用计算机模拟设计，完善的双磁极结构，磁场强度高，梯度大，吸力大；
- 高性能钕铁硼做磁源，磁能积高，不易退磁，八年退磁不超过5%；
- 腰鼓形滚筒结构，具备自动纠偏功能，全密封轴承座，密封性好，能适应各种恶劣环境；
- 皮带自动卸铁，可保障长期无故障连续运行。

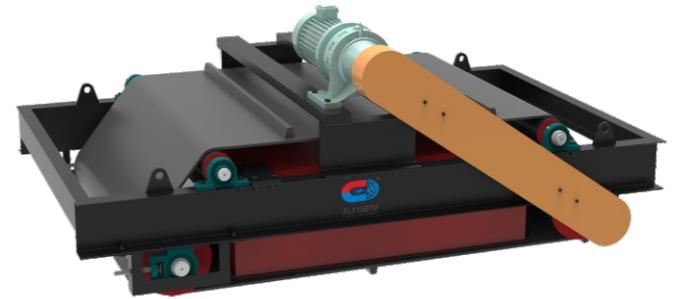

- Adopting the computer simulation to design the Magnetic circuit, with perfect double magnetic pole structure, higher magnetic intensity, higher gradient, higher magnetic force.
- High-performance NdFeB magnetic material as the magnetic source, High magnetic energy, not easy to demagnetize, and demagnetization does not exceed 5% in 8 years.
- Waist drum-shaped drum structure, with automatic correction function, fully sealed bearing, good sealing, can adapt to a variety of harsh environments.
- Automatic unloading belt, can guarantee long-term trouble-free continuous operation.



## TLRCT 上部进料磁滚筒

TLRCT Upper Feed Magnetic Drum

### 产品简介

Product Introduction

本产品是经振动给料机从磁选滚筒上部进料的一种半磁封闭式结构磁选设备。磁场强度1000-8000Gs可选，吸铁能力大，分选效果好。

This product is a kind of Semi-magnetic closed-type structure magnetic separator, which is fed by vibrating feeder from the upper part of magnetic drum. The magnetic field strength of 1000-8000Gs can be selected.

### 产品优点

Product Advantage

- 滚筒采用有效的防护装置，防止筒皮磨损；
- 磁场强度强、磁场的范围大、磁滚筒表面从1000-8000GS根据客户实际情况选定；
- 自动分离、连续作业、处理量大、回收率高；
- 结构简单、运行可靠、易于安装。



- Drum adopt effective protective device,to prevent the cylinder wear.
- Strong magnetic field intensity,the range of magnetic field is big, magnetic drum mixer surface from 1000-8000gs selected according to the customer.
- Automatic separation, continuous operation, large capacity, high recovery rate.
- Pieces of simple structure, reliable operation, easy to install.


## TLSXG 永磁上吸式磁滚筒

TLSXG Perm-Magnetic Drum

### 产品简介

Product Introduction

- 电磁式和永磁型； ● 用于加工各类有色金属；
- 自动地分离铁磁性物质；
- 适用于废钢，含铁量大和有尖锐铁件的物料。
- Electromagnetic type and perm-magnet type;
- For processing from many nonferrous metals;
- Suitable for steel scrap, separation for large amount of iron and iron sharp materials.
- Automatic continuous separation of ferromagnetic substance;

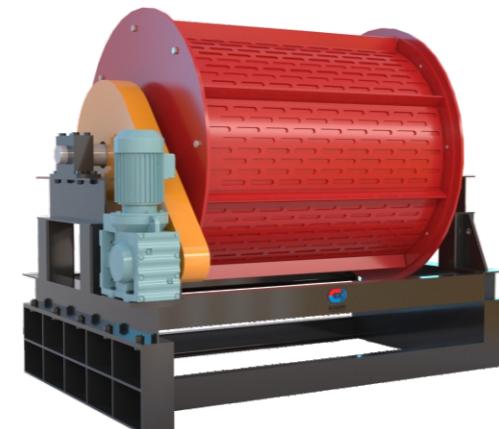

## TLBL 板链式给料机

TLBL Board Chain Feeder

### 产品简介

Product Introduction

适用于从储料仓到破碎机、振动筛、配料等机械设备的短距离输送。进料均匀，无需人工操作，自带拔料功能，板链式给料机对物料有较大的适应性，不受物料的粒度、比重大小限制。



Suitable for short distance transportation from storage bin to crusher, shaker, batching and other mechanical equipment. Uniform feeding, no manual operation, with its own pulling function,board chain feeder has greater adaptability to the material,not limited by the size of the material,specific gravity.

## 大倾角皮带输送机

Large Inclination Belt Conveyor

### 产品简介

Product Introduction

大倾角皮带输送机可以大角度输送，具有输送量大，占地面积小，维护简单等特点，广泛被使用。





# 天力-科技让资源再生!

TianLi-Technology Regenerates Resources





## SERVICE COMMITMENT

### 售后服务承诺



> 及时提供合同相关设备的安装调试，全面配合验收。

Timely provide the installation and debugging of contract related equipment, and fully cooperate with the acceptance.



> 随时解决顾客反馈的问题，有关产品质量投诉保证派出最佳人员赴现场。

Solve customer feedback problems at any time, and guarantee to send the best personnel to the site for product quality complaints.

> 实施“一对一营销”，全面建立客户档案，服务结果请客户签字确认后存档。

Implement “one-to-one marketing” and build up comprehensively Customer files, service results please sign for confirmation after archiving.



### 固废整体解决方案提供商！

全国统一服务电话

400-1122-958



## 感谢您对天力磁电的信任与厚爱

THANK YOU FOR YOUR TRUST AND LOVE  
TO TIANLI MAGNET